


3-PORT DIVERTER VALVE | WITH PLASTIC COVER

BANICO

Controls

230 Vac (24 Vac and 110 Vac on request), 6 W power consumption. 5 Core, 1 metre cable length with 'industry standard' colour coded wire. Auxillary microswitch 3A - 250 Vac. Max amp temp 60°C, Media temp 5 to 88°C K.V. measured in m³/h for 1 bar pressure drop. Manual lever for filling/draining. Port A is normally closed when there is no power. Detachable actuator.

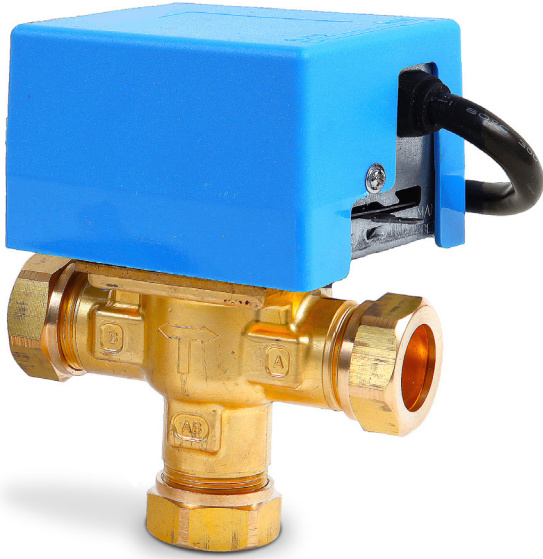


DIVERTER VALVES

with plastic cover

Auxillary microswitch fitted as standard

| | | |
|----------|---------------------|--------|
| ZVD22P | 22mm Compression | KV 4.3 |
| ZVD28P | 28mm Compression | KV 5.0 |
| ZVD1/2P | ½" BSP female* | KV 4.3 |
| ZVD3/4P | ¾" BSP female* | KV 4.3 |
| ZVD3/4CP | ¾" Comp. Irish pipe | KV 4.3 |
| ZVD1P | 1" BSP female* | KV 5.0 |
| ZVD1CP | 1" Comp. Irish pipe | KV 5.0 |

*Male version on request

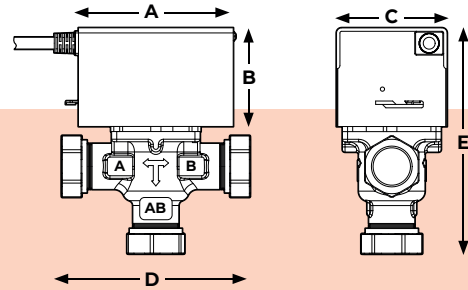

APPLICATION

The ZVD range 3-port spring return valve has been designed to control the flow of water in domestic central heating systems, where both the radiator and hot water cylinder circuits are pumped, on a selective priority basis.


| | | | | | |
|---------|--------|--------|--------|---------|---------|
| ZVD22P | A = 87 | B = 55 | C = 60 | D = 110 | E = 133 |
| ZVD28P | A = 87 | B = 55 | C = 60 | D = 115 | E = 137 |
| ZVD1/2P | A = 87 | B = 55 | C = 60 | D = 94 | E = 124 |
| ZVD3/4P | A = 87 | B = 55 | C = 60 | D = 94 | E = 124 |
| ZVD1P | A = 87 | B = 55 | C = 60 | D = 94 | E = 124 |

All figures are in mm


PORT AB = Pumped flow from boiler
 Port A = Heating circuit
 PORTB = Domestic hot water circuit

Max Static Pressure - 8.6bar

British design.
British quality.

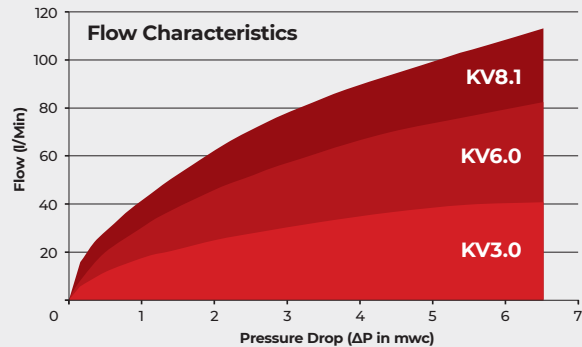

Optional Features



CONNECTORS

All valves are available with pull/push connector option for ease of installation and replacement.



INDICATOR LIGHTS

LED visual indicator showing operating status.

Need Some Help? GET IN CONTACT:

0161 946 0088

banico.co.uk
info@banico.co.uk