

MOTORISED SPRING RETURN VALVES


230 Vac (24 Vac and 110 Vac on request), 6 W power consumption.
 5 Core, 1 metre cable length with 'industry standard' colour coded wire.
 Auxillary microswitch 3A - 250 Vac.
 Max amp temp 60°C, Media temp 5 to 88°C
 K.V. measured in m³/h for 1 bar pressure drop.
 Manual lever for filling/draining.
 Port A is normally closed when there is no power.

zone valves 2 port

Auxillary microswitch fitted as standard

ZV22	22mm Compression	KV 6.9
ZV28	28mm Compression	KV 8.6
ZV1/2	1/2" BSP female	KV 3.0
ZV3/4	3/4" BSP female*	KV 6.9
ZV1	1" BSP female*	KV 8.6

*Male and compression version on request



ZV22	A = 87	B = 55	C = 60	D = 112
ZV28	A = 87	B = 55	C = 60	D = 117
ZV1/2	A = 84	B = 62	C = 66	D = 83
ZV3/4	A = 87	B = 55	C = 60	D = 94
ZV1	A = 87	B = 55	C = 60	D = 94




diverter valves 3 port

Auxillary microswitch on request

ZVD22	22mm Compression	KV 6.0
ZVD28	28mm Compression	KV 8.1
ZVD1/2	1/2" BSP female	KV 3.0
ZVD3/4	3/4" BSP female*	KV 6.0
ZVD1	1" BSP female*	KV 8.1

*Male and compression version on request

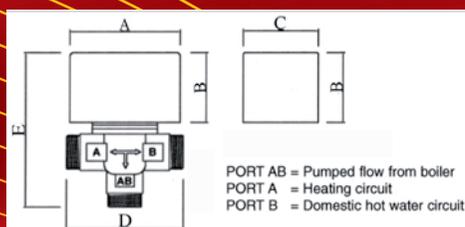

ZVD22	A = 87	B = 55	C = 60	D = 112	E = 133
ZVD28	A = 87	B = 55	C = 60	D = 117	E = 137
ZVD1/2	A = 84	B = 62	C = 66	D = 83	E = 120
ZVD3/4	A = 87	B = 55	C = 60	D = 94	E = 124
ZVD1	A = 87	B = 55	C = 60	D = 94	E = 124

