


3-PORT DIVERTER VALVE | WITH METAL COVER

BANICO
Controls

230 Vac (24 Vac and 110 Vac on request), 6 W power consumption. 5 Core, 1 metre cable length with 'industry standard' colour coded wire. Auxillary microswitch 3A - 250 Vac. Max amp temp 60°C, Media temp 5 to 88°C K.V. measured in m³/h for 1 bar pressure drop. Manual lever for filling/draining. Port A is normally closed when there is no power. Detachable actuator.

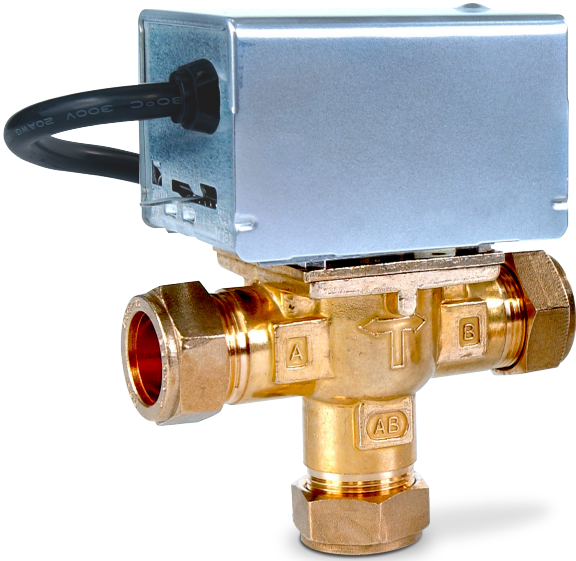

DIVERTER VALVES

with metal cover

Auxillary microswitch fitted as standard

ZVD22 22mm Compression KV 4.3

ZVD28 28mm Compression KV 5.0

ZVD1/2 ½" BSP female KV 4.3

ZVD3/4 ¾" BSP female* KV 4.3

ZVD3/4C ¾" Comp. Irish pipe KV 4.3


ZVD1 1" BSP female* KV 5.0

ZVDIC 1" Comp. Irish pipe KV 5.0

*Male version on request

APPLICATION

The ZVD range 3-port spring return valve has been designed to control the flow of water in domestic central heating systems, where both the radiator and hot water cylinder circuits are pumped, on a selective priority basis.

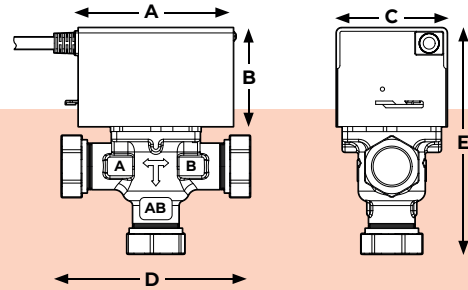


ZVD22	A = 87	B = 55	C = 60	D = 110	E = 133
ZVD28	A = 87	B = 55	C = 60	D = 115	E = 137
ZVD1/2	A = 87	B = 55	C = 60	D = 94	E = 124
ZVD3/4	A = 87	B = 55	C = 60	D = 94	E = 124
ZVD1	A = 87	B = 55	C = 60	D = 94	E = 124

All figures are in mm


PORT AB = Pumped flow from boiler
Port A = Heating circuit
PORTB = Domestic hot water circuit

Max Static Pressure - 8.6bar

British design.
British quality.

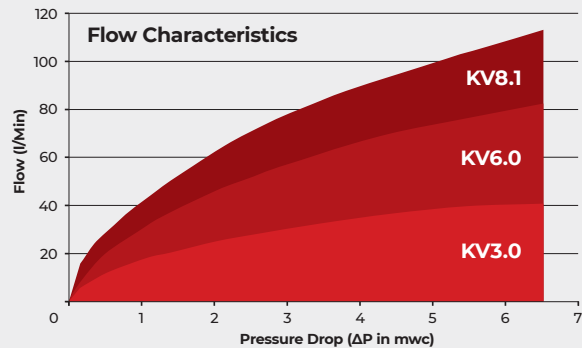

Optional Features



CONNECTORS

All valves are available with pull/push connector option for ease of installation and replacement.



INDICATOR LIGHTS

LED visual indicator showing operating status.

Need Some Help? GET IN CONTACT:

0161 946 0088

banico.co.uk
info@banico.co.uk