




mid-position valves 3 port

ZVM range mid-position diverter valves is designed to allow waterflow through one of the two outlet ports or both ports at the same time.

ZVM22	22mm Compression	KV 6.0
ZVM28	28mm Compression	KV 8.1
ZVM3/4	3/4" BSP female	KV 6.0
ZVM1	1" BSP female	KV 8.1



ZVM22	A = 87	B = 55	C = 60	D = 112	E = 133
ZVM28	A = 87	B = 55	C = 60	D = 117	E = 137
ZVM3/4	A = 87	B = 55	C = 60	D = 94	E = 124
ZVM1	A = 87	B = 55	C = 60	D = 94	E = 124

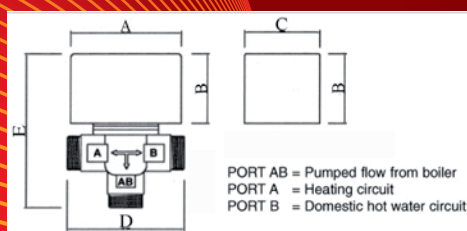

replacement heads

Actuator replaceable without draining

H-ZV	Fits 2-port zone valves	22mm, 28mm, 3/4" & 1"
H-ZVD	Fits 3-port diverter valves	22mm, 28mm, 3/4" & 1"
H-ZVM	Fits 3-port mid-position valves	22mm, 28mm, 3/4" & 1"



synchron motors

Standard Universal Motor
6 W
5 RPM

SM-1	230 Vac
SM-110	110 Vac
SM-24	24 Vac