

HIGH PRESSURE ZONE VALVES

22mm comp Female - 2 port

Motorised Zone Valves with higher pressure capability.

ZVH22	230Vac	16 bar
ZVH22-24	24Vac (with transformer)	16 bar


APPLICATION

ZVH range valves are designed for specialist systems and operate as a 2-port zone valve, however with a max pressure that is higher than the industry standard.

- Max Static Pressure - 16Bar
- Max Differential Pressure - 6Bar
- Opening time - 16 sec
- Closing time - 16 sec
- Flow Temperature - 1-95°C
- Ambient Temperature - 0-65°C

OPTIONAL FEATURES | FOR ALL VALVES

CONNECTORS

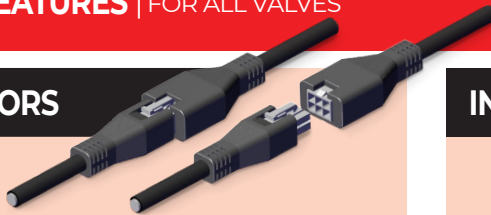

All valves are available with pull/push connector option for ease of installation and replacement.

There is no electrical installation necessary for replacing a unit, speeding up the process for connection to a new or existing system.



INDICATOR LIGHTS



All valves are available with optional LED visual indicator which shows operating status.

This feature allows for easy, visual indication of the operating status of the valve. Why not also use our connector system? Helping you swap an actuator quickly and efficiently, getting you back up and running.



EXACT CUSTOMISED SOLUTIONS

In addition to the standard controls featured, we can also supply customised products, designed and manufactured to meet your exact needs. If you need the controls badged, no problem, let us know your particular marketing requirements.

Optional Features



CONNECTORS
All valves are available with pull/push connector option for ease of installation and replacement.



INDICATOR LIGHTS
LED visual indicator showing operating status.

Need Some Help? GET IN CONTACT:

0161 946 0088
banico.co.uk
info@banico.co.uk